

90 mph

130 mph

(.375")

6" X-Strong

(.432")

(.337")

5" X-Strong

(.375")

(.203")

3" X-Strong

(.300")

GENERAL NOTES:

Design conforms to 2013 AASHTO Standard Specifications for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design 3-second gust wind speeds of 90 mph and 130 mph with a 1.14 gust factor, and a wind importance factor of 1.0 (50-year mean recurrence interval) for the supporting structures. For mounting connection between sign panel and pipe, wind importance factors of 0.71 and 0.54, for 90 mph and 130 mph winds, respectively, are applied to adjust the wind speeds to a 10-year mean recurrence interval.

See standard sheet WV & IZ(LTS2013) for the boundaries of each design wind zone. All mounting shall be based on 130 mph wind speed design except when located in 90 mph wind zone. Maximum panel area is 30 sq. ft. Maximum design height is 50 ft, with design height defined as the distance between natural ground (average elevation of surrounding terrain) and the center of sign(s) at the mounting location.

Material for pipe shall be ASTM A53 Grade B, or A501. Structural steel plates shall be ASTM A36, A572 Grade 50, or A588. Bolts used to connect pipe and mounting bracket, and wind beam to sign panel shall be ASTM A307. Anchor bolts shall be ASTM A325 or A193 B7. Each anchor bolt shall be provided with 2 flat washers, 1 lock washer, and 1 heavy hex nut. All parts shall be galvanized in accordance with Standard Specifications Item 445, "Galvanizing".

Attach horizontal pipe at least 2'-0" from the edge of any nearby drain slot.

Contractor shall verify applicable field dimensions before fabrication. Holes drilled through the railing parapet wall shall be drilled with rotary (coring or masonry drill) type equipment. Percussion (star) drilling shall not be allowed. Anchorage for pipe attached to rail shall be placed using an anchoring system approved by the engineer. Installation of anchor fasteners including hole depth, diameter and material shall be in accordance with the manufacturers' recommendation.

Each embedded anchor fastener shall resist an allowable design loading (after applying the reduction factors of bolt spacing and bolt edge distance) of:

		90 mpn
Tension	12.5 kips	7.5 kips
Shear	9.0 kips	5.0 kips

Each anchoring system shall provide a capacity to resist the required tension and shear acting simultaneously.

For sign connection to mounting, shop drill holes on sign blank in accordance with the current Standard Highway Sign Designs for Texas (SHSD). Additional hole(s) needed to meet a stipulated-type mounting may be field drilled. For multi-sign or back-to-back signs mounting, the engineer shall determine the proper type which ensures each individual mounting meets

Refer to Standard sheets SMD(GEN). SMD(SLIP-2 and SMD(2-1) for details not covered here.

SHEET 1 OF 3




Traffic Operations Division Standard

BRIDGE RAILING SIGN MOUNT DETAILS

SMD(BR-1)-14

FILE:	smdbr-14.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT		ск: TxDOT
© TxDOT	August 2014	CONT	SECT	JOB		HIGHWAY		
	REVISIONS							
		DIST		COUNTY SHE		SHEET NO.		

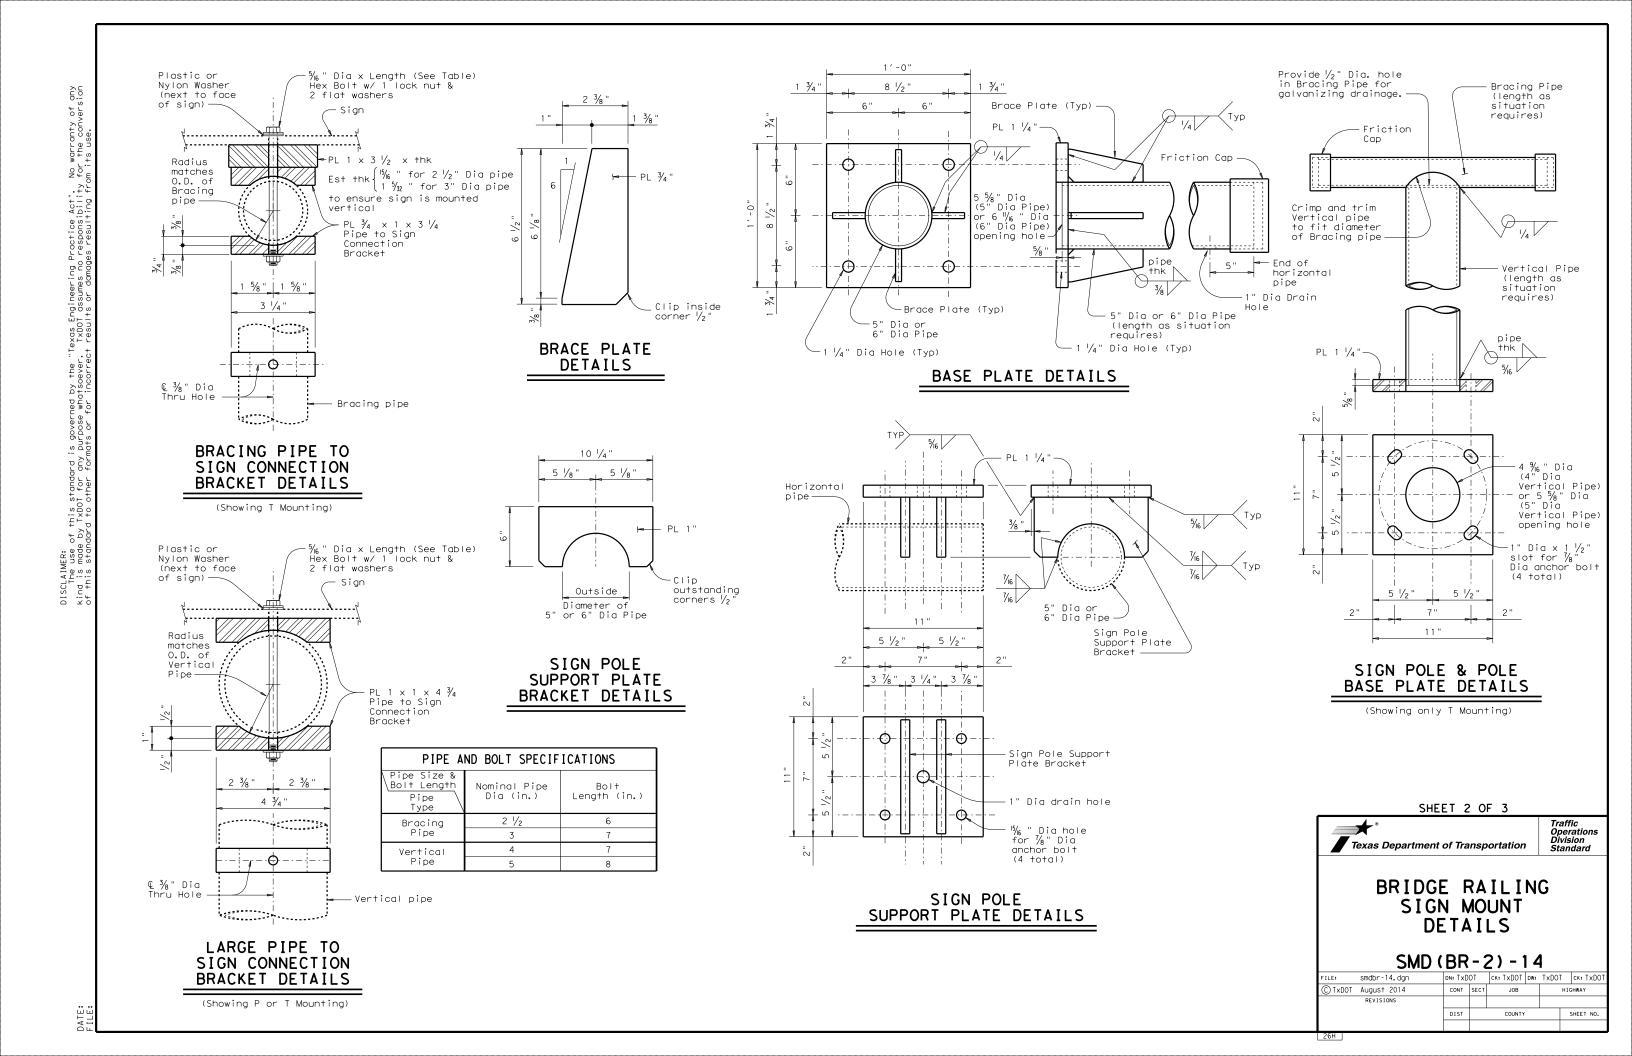

26J